

NASA TECH BRIEF

Marshall Space Flight Center



NASA Tech Briefs announce new technology derived from the U.S. space program. They are issued to encourage commercial application. Tech Briefs are available on a subscription basis from the National Technical Information Service, Springfield, Virginia 22151. Requests for individual copies or questions relating to the Tech Brief program may be directed to the Technology Utilization Office, NASA, Code KT, Washington, D. C. 20546.


Foam-Machining Tool With Eddy-Current Transducer

The problem:

Previous methods of machining large-diameter foam-covered tanks depended on a microwave transducer to direct machine-tool activity. A microwave transducer, however, is complicated and cumbersome to mount on the machine-tool head and requires extensive support equipment. Prior foam-machining tools also require a specially designed cutterhead.

The solution:

A three-cutter machining system incorporates an eddy-current sensor. This type of sensor is smaller and enables more accurate cuts to be made than microwave-based sensors. The eddy-current transducer feeds a signal to a numerical controller which programs the rotational and vertical axes of sensor travel, thus enabling the cutterhead to profile around tank protrusions. The chips produced are evacuated through a hollow spindle.

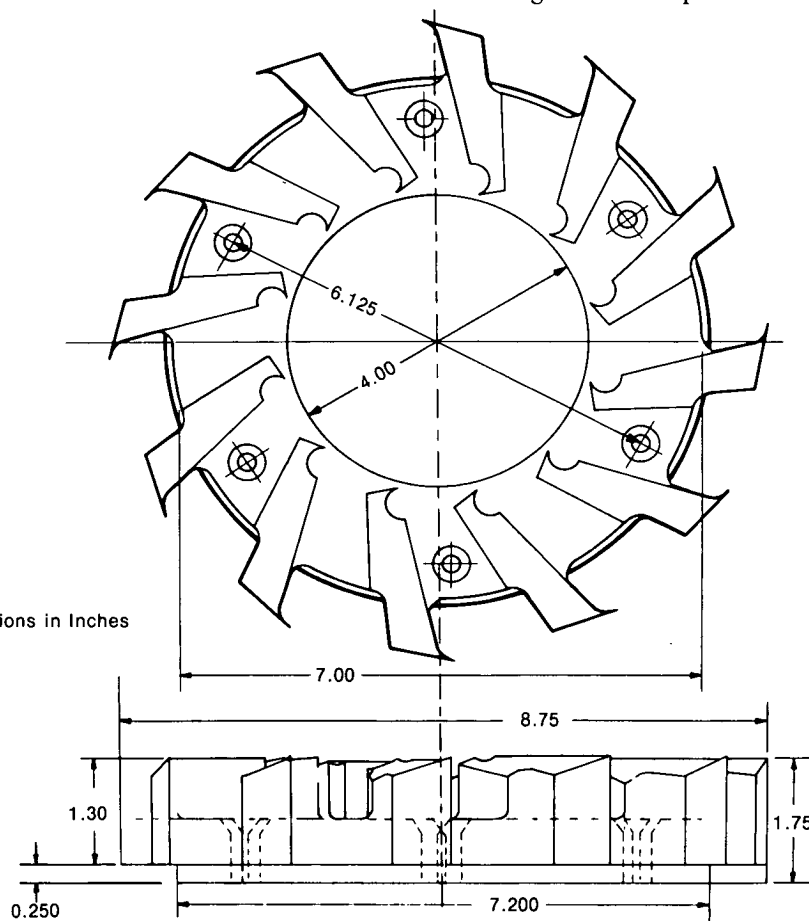

Note: All Dimensions in Inches

Foam Machining-Tool Cutter Blade, Top and Side Views

(continued overleaf)

How it's done:

The multicutters slice a 24-inch (61-cm) bandwidth per pass and operate at a maximum of 12 surface feet (3.5 m) per minute around a tank measuring 33 feet (10 m) in diameter. The sensor is installed in the center of the cutter and spindle. A servocontroller directs the movements of a servomotor which drives a ball-screw-and-nut advance/retract mechanism.

The servosystem is activated by electrohydraulic components. A 12-inch (30-cm) double-acting primary positioning cylinder is controlled by a four-way solenoid-actuated valve. A 4-inch (10-cm) double-acting secondary positioning cylinder moves the machining unit into or away from the foam. This cylinder is directed via a two-stage flow-control servovalve which, in turn, receives its signal from the eddy-current sensor.

The machining head has three hollow spindles. Each consists of an aluminum spindle body and a hollow steel shaft with ball bearings pressed into the spindle bodies. The spindles are aligned vertically in the cutter mechanism.

The sensor operates via eddy-current loss. A bridge circuit is activated by a 1-MHz carrier signal. Two arms of the bridge (two coils) comprise the transducer. Magnetic-flux lines emanating from the

transducer pass into the conductive surface being sensed and produce eddy currents. As the conductive surface moves closer (or further away) the transducer eddy-current loss increases or decreases accordingly. Sensed impedance variations are converted to a dc voltage proportional to the distance being sensed.

Note:

Requests for further information may be made in writing to:

Technology Utilization Officer

Marshall Space Flight Center

Code AT01

Marshall Space Flight Center, Alabama 35812

Reference: B75-10309

Patent status:

Inquiries concerning rights for the commercial use of this invention should be addressed to:

Patent Counsel

Marshall Space Flight Center

Code CC01

Marshall Space Flight Center, Alabama 35812

Source: W. P. Coppfer of
Martin Marietta Corp.
(MFS-23298)